VISIT…

TDA1904

4W AUDIO AMPLIFIER

- HIGH OUTPUT CURRENT CAPABILITY
- PROTECTION AGAINST CHIP OVERTEMPERATURE
- LOW NOISE
- HIGH SUPPLY VOLTAGE REJECTION
- SUPPLY VOLTAGE RANGE: 4V TO 20V



Powerdip
(8 + 8)

ORDERING NUMBER : TDA 1904

DESCRIPTION

The TDA 1904 is a monolithic integrated circuit in POWERDIP package intended for use as low-frequency power amplifier in wide range of applications in portable radio and TV sets.

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V_S	Supply voltage	20	V
I_O	Peak output current (non repetitive)	2.5	A
I_O	Peak output current (repetitive)	2	A
P_{tot}	Total power dissipation at T_{amb} = 80°C	1	W
	at T_{pins} = 60°C	6	W
T_{stg}, T_j	Storage and junction temperature	-40 to 150	°C

TEST AND APPLICATION CIRCUIT

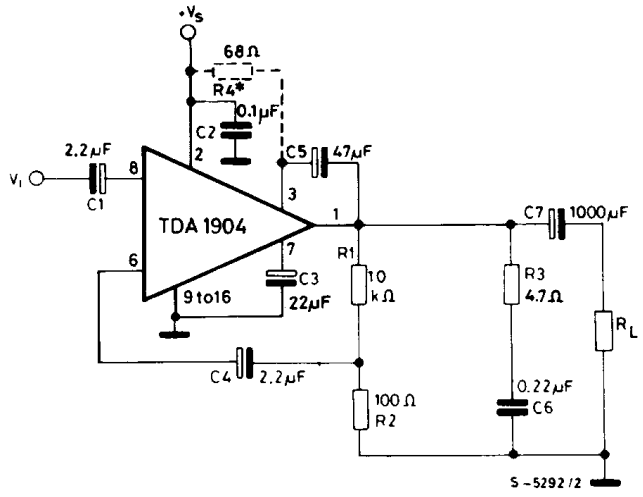

(*) R4 is necessary only for V_S < 6V.

PIN CONNECTION

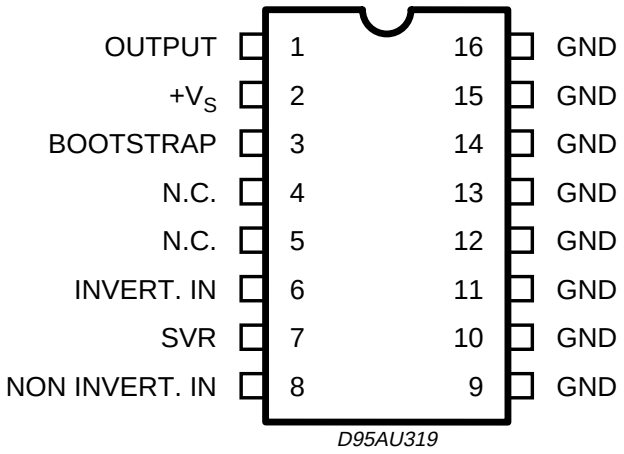

SCHEMATIC DIAGRAM

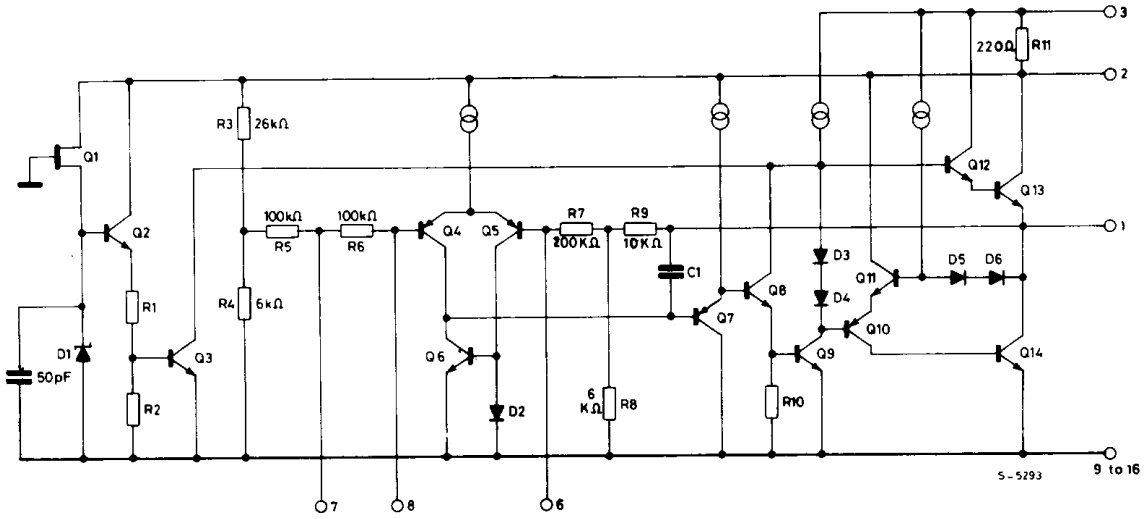

THERMAL DATA

Symbol	Parameter		Value	Unit
$R_{th\text{-}j\text{-}case}$	Thermal resistance junction-pins	max	15	°C/W
$R_{th\text{-}j\text{-}amb}$	Thermal resistance junction-ambient	max	70	°C/W

ELECTRICAL CHARACTERISTICS (Refer to the test circuit, T_{amb} = 25 °C, R_{th} (heatsink) = 20 °C/W, unless otherwisw specified)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_s	Supply voltage		4		20	V
V_o	Quiescent output voltage	V_s = 4V V_s = 14V		2.1 7.2		V
I_d	Quiescent drain current	V_s = 9V V_s = 14V		8 10	15 18	mA
P_o	Output power	d = 10% f = 1 KHz V_s = 9V R_L = 4Ω V_s = 14V V_s = 12V V_s = 6V	1.8 4 3.1 0.7	2 4.5		W
d	Harmonic distortion	f = 1 KHz V_s = 9V R_L = 4Ω P_o = 50 mW to 1.2W		0.1	0.3	%
V_i	Input saturation voltage (rms)	V_s = 9V V_s = 14V	0.8 1.3			V
R_i	Input resistance (pin 8)	f = 1 KHz	55	150		KΩ
h	Efficiency	f = 1 KHz V_s = 9V R_L = 4Ω P_o = 2W V_s = 14V R_L = 4Ω P_o = 4.5W		70 65		%
BW	Small signal bandwidth (-3 dB)	V_s = 14V R_L = 4Ω	40 to 40,000			Hz
G_v	Voltage gain (open loop)	V_s = 14V f = 1 KHz		75		dB
G_v	Voltage gain (closed loop)	V_s = 14V R_L = 4Ω f = 1 KHz P_o = 1W	39.5	40	40.5	dB
e_N	Total input noise	R_g = 50Ω R_g = 10 KΩ (°)		1.2 2	4	μV
		R_g = 50Ω R_g = 10 KΩ (°°)		2 3		μV
SVR	Supply voltage rejection	V_s = 12V f_{ripple} = 100 Hz R_g = 10 KΩ V_{ripple} = 0.5 Vrms	40	50		dB
T_{sd}	Thermal shut-down case temperature	P_{tot} = 2W		120		ÉC

Note: (°) Weighting filter = curve A.
(°°) Filter with noise bendwidth: 22Hz to 22 KHz.

Figure 1. Test and application circuit

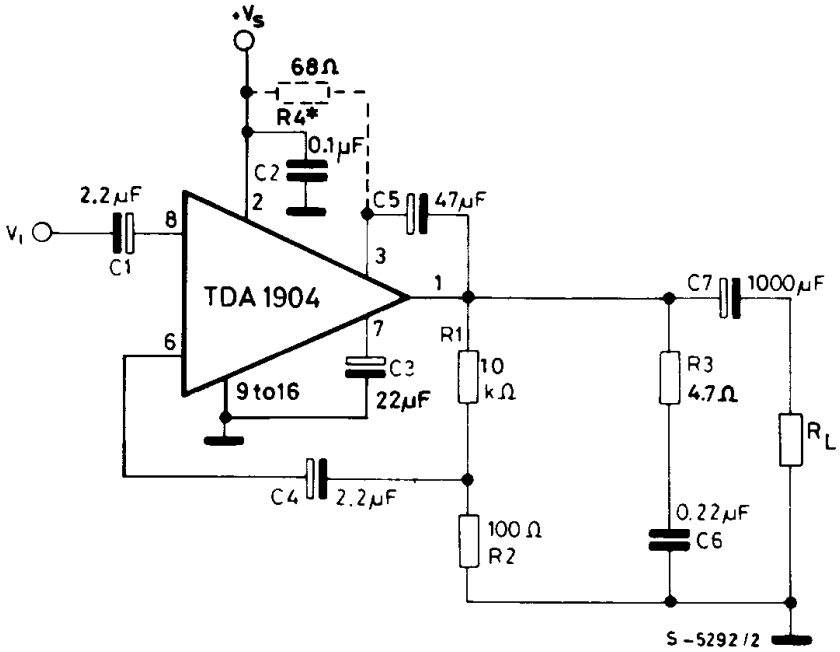

(*) R4 is necessary only for V_S < 6V

Figure 2. P.C. board and components layout of fig. 1 (1 : 1 scale)

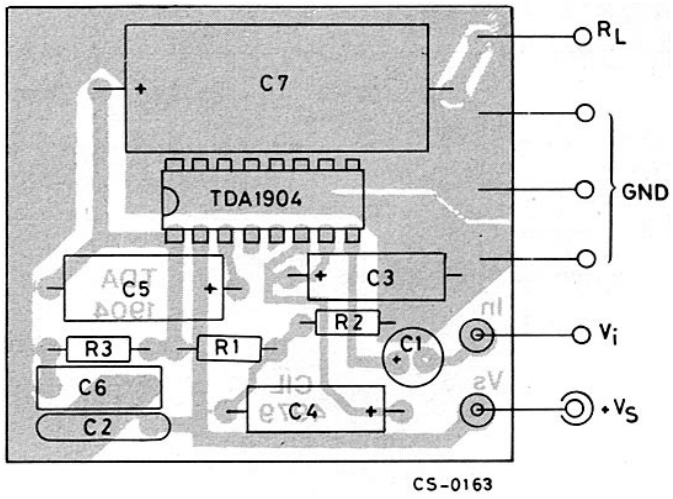

APPLICATION SUGGESTION

The recommended values of the external components are those shown on the application circuit of fig. 1.

When the supply voltage V_S is less than 6V, a 68Ω resistor must be connected between pin 2 and pin 3 in order to obtain the maximum output power.

Different values can be used. The following table can help the designer.

Components	Recomm. value	Purpose	Larger than recommended value	Smaller than recommended value	Allowed range	
					Min.	Max.
R1	10 KΩ	Feedback resistors	Increase of gain.	Decrease of gain. Increase quiescent current.	9R3	
R2	100 Ω		Decrease of gain.	Increase of gain.		1 KΩ
R3	4.7 Ω	Frequency stability	Danger of oscillation at high frequencies with inductive loads.			
R4	68 Ω	Increase of the output swing with low supply voltage.			39 Ω	220 Ω
C1	2.2 µF	Input DC decoupling.	Higher cost lower noise.	Higher low frequency cutoff. Higher noise.		
C2	0.1 µF	Supply voltage bypass.		Danger of oscillations.		
C3	22 µF	Ripple rejection	Increase of SVR increase of the switch-on time.	Degradation of SVR.	2.2 µF	100ΩF
C4	2.2 µF	Inverting input DC decoupling.	Increase of the switch-on noise	Higher low frequency cutoff.	0.1 ΩF	
C5	47 µF	Bootstrap.		Increase of the distortion at low frequency.	10 µF	100µF
C6	0.22 µF	Frequency stability.		Danger of oscillation.		
C7	1000 µF	Output DC decoupling		Higher low frequency cutoff.		

Figure 3. Quiescent output voltage vs. supply voltage

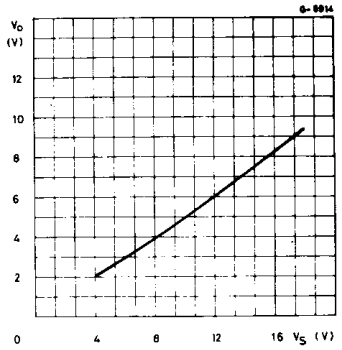

Figure 4. Quiescent drain current vs. supply voltage



Figure 5. Output power vs. supply voltage



Figure 6. Distortion vs. output power



Figure 7. Distortion vs. output power



Figure 8. Distortion vs. output power

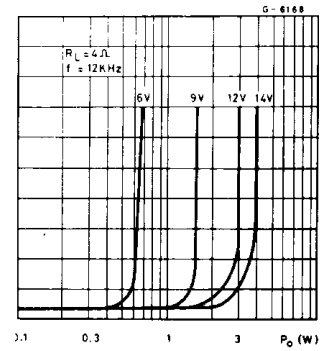

Figure 9. Distortion vs. output power



Figure 10. Distortion vs. output power



Figure 11. Distortion vs. output power



Figure 12. Distortion vs. frequency

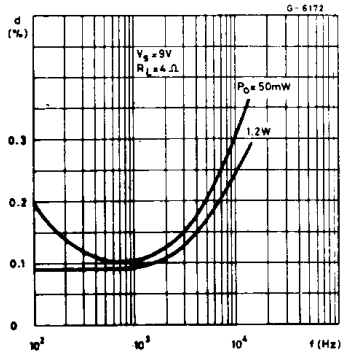

Figure 13. Distortion vs. frequency

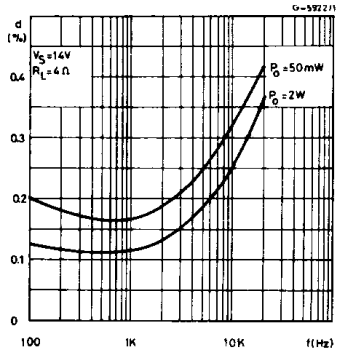

Figure 14. Distortion vs. frequency

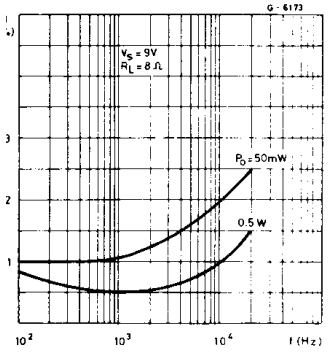

Figure 15. Distortion vs. frequency

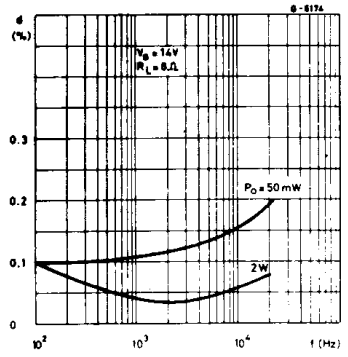

Figure 16. Supply voltage rejection vs. frequency

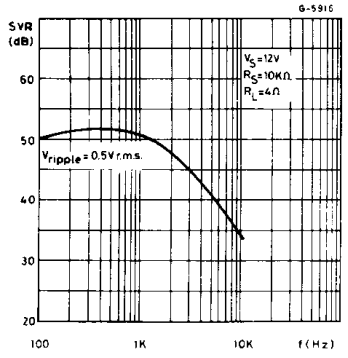

Figure 17. Total power dissipation and efficiency vs. output power

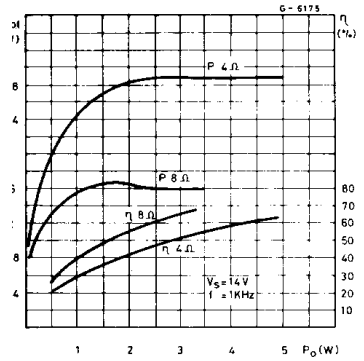

Figure 18. Total power dissipation and efficiency vs. output power

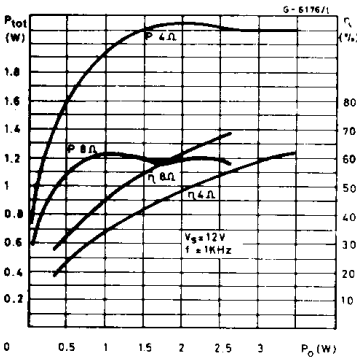

Figure 19. Total power dissipation and efficiency vs. output power

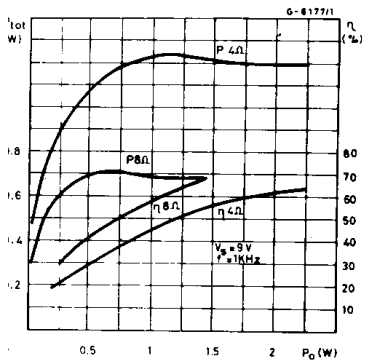

Figure 20. Total power dissipation and efficiency vs. output power

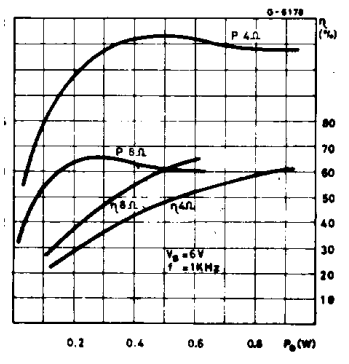

THERMAL SHUT-DOWN

The presence of a thermal limiting circuit offers the following advantages:

1) An overload on the output (even if it is permanent), or an above limit ambient temperature can be easily tolerated since the T_j cannot be higher than 150°C.
2) The heatsink can have a smaller factor of safety compared with that of a conventional circuit. There is no possibility of device damage due to high junction temperature.
   If for any reason, the junction temperature increase up to 150°C, the thermal shut-down simply reduces the power dissipation and the current consumption.

MOUNTING INSTRUCTION

The TDA 1904 is assembled in the Powerdip, in which 8 pins (from 9 to 16) are attached to the frame and remove the heat produced by the chip.

Figure 21 shows a PC board copper area used as a heatsink (l = 65 mm).

The thermal resistance junction-ambient is 35°C.

Figure 21. Example of heatsink using PC board copper (l = 65 mm)

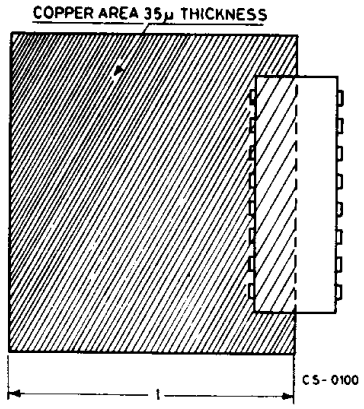

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
a1	0.51			0.020		
B	0.85		1.40	0.033		0.055
b		0.50			0.020	
b1	0.38		0.50	0.015		0.020
D			20.0			0.787
E		8.80			0.346	
e		2.54			0.100	
e3		17.78			0.700	
F			7.10			0.280
I			5.10			0.201
L		3.30			0.130	
Z			1.27			0.050

OUTLINE AND MECHANICAL DATA



Powerdip 16

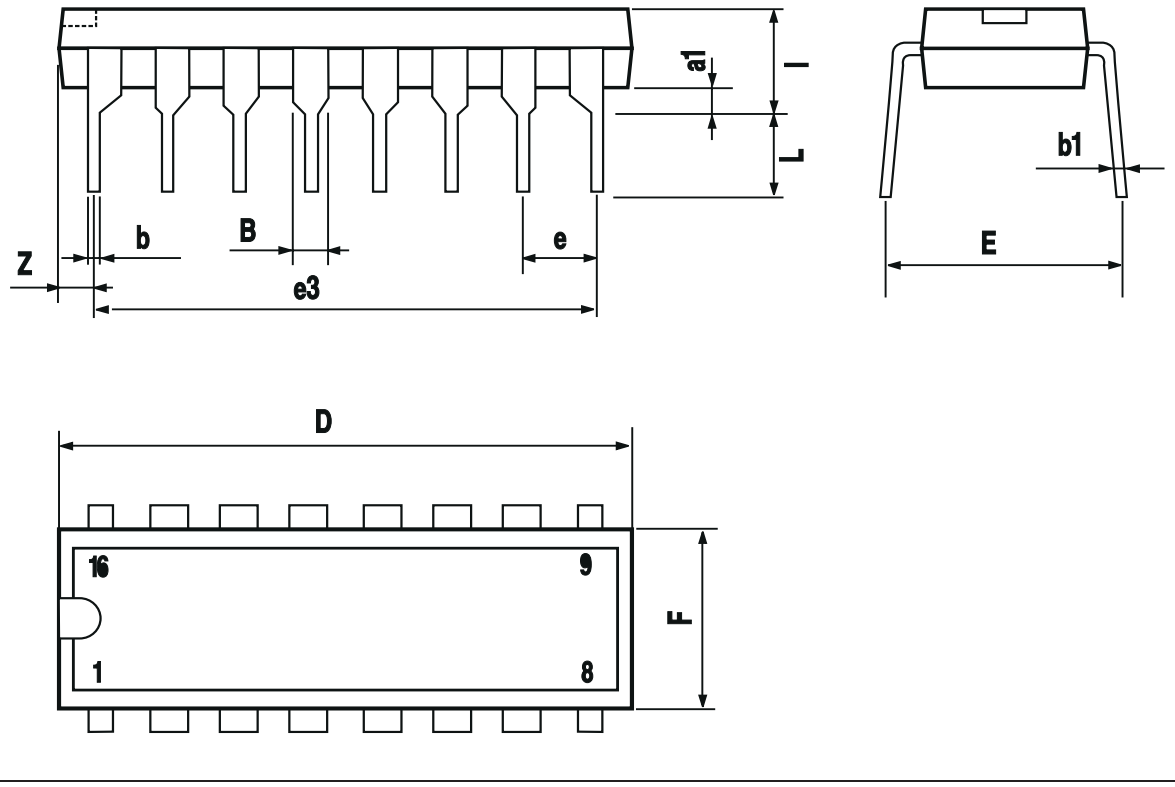

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics.

All other names are the property of their respective owners

© 2003 STMicroelectronics - All rights reserved

STMicroelectronics GROUP OF COMPANIES

Australia – Belgium - Brazil - Canada - China – Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States

www.st.com